




Tubi
Pipes
Tubes
Tubos






**Tubo senza saldatura API 5L/ASTM A106 ANSI B 36.10
SCH. Standard (STD) - Acciaio al carbonio**

Seamless pipe SCH.STD - Carbon steel

Tube sans soudure SCH. STD - Acier carbone

Tubo sin soldadura SCH. STD - Acero al carbono

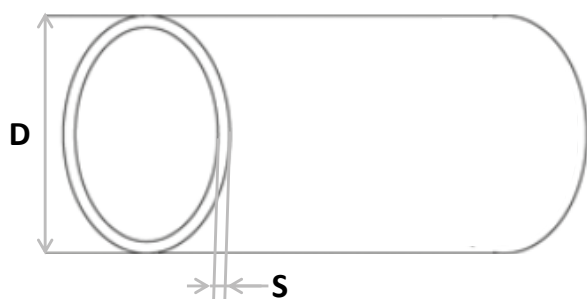

D		ø	S	Kg/m
1/2"		21,3	2,77	1,27
3/4"		26,7	2,87	1,68
1"		33,4	3,38	2,50
1 1/4"		42,4	3,56	3,38
1 1/2"		48,3	3,68	4,05
2"		60,3	3,91	5,44
2 1/2"		73	5,16	8,62
3"		88,9	5,49	11,29
4"		114,3	6,02	16,07
5"		141,3	6,55	21,78
6"		168,3	7,11	28,26
8"		219,1	8,18	42,53
10"		273	9,27	60,29
12"		323,8	9,52	77,72




**Tubo senza saldatura API 5L/ASTM A106 ANSI B 36.10
SCH. Extra Strong (XS) - Acciaio al carbonio**

Seamless pipe SCH. XS - Carbon steel

Tube sans soudure SCH. XS - Acier carbone

Tubo sin soldadura SCH. XS - Acero al carbono

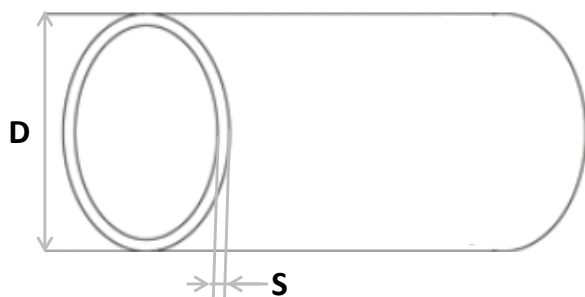

D		ø	S	Kg/m
1/2"		21,3	3,73	1,62
3/4"		26,7	3,91	2,20
1"		33,4	4,55	3,24
1 1/4"		42,4	4,85	4,47
1 1/2"		48,3	5,08	5,41
2"		60,3	5,54	7,48
2 1/2"		73	7,01	11,41
3"		88,9	7,62	15,27
4"		114,3	8,56	22,32



**Tubo senza saldatura ASTM A312 ASME B 36.19
SCH. 10S - Acciaio inox**




Seamless pipe SCH.10S - Stainless steel



Tube sans soudure SCH.10S - Acier inoxydable



Tubo sin soldadura SCH.10S - Acero Inoxidable

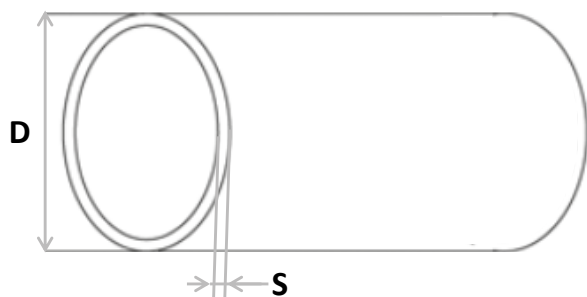

D		ø	S	Kg/m
1/2"		21,3	2,11	1,01
3/4"		26,7	2,11	1,29
1"		33,4	2,77	2,12
1 1/4"		42,4	2,77	2,73
1 1/2"		48,3	2,77	3,15
2"		60,3	2,77	3,99
2 1/2"		73	3,05	5,34
3"		88,9	3,05	6,55
4"		114,3	3,05	8,49
5"		141,3	3,40	11,74
6"		168,3	3,40	14,03
8"		219,1	3,76	20,00




**Tubo senza saldatura ASTM A312 ASME B 36.19
SCH. 40S - Acciaio inox**

Seamless pipe SCH. 40S - Stainless steel

Tube sans soudure SCH. 40S - Acier inoxydable

Tubo sin soldadura SCH. 40S - Acero Inoxidable

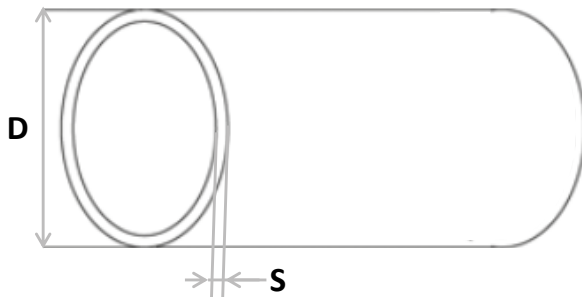

D		ø	S	Kg/m
1/2"		21,3	2,77	1,28
3/4"		26,7	2,87	1,71
1"		33,4	3,38	2,54
1 1/4"		42,4	3,56	3,44
1 1/2"		48,3	3,68	4,10
2"		60,3	3,91	5,52
2 1/2"		73	5,16	8,76
3"		88,9	5,49	11,46
4"		114,3	6,02	16,32
5"		141,3	6,55	22,10
6"		168,3	7,11	28,69
8"		219,1	8,18	43,20



**Tubo senza saldatura ASTM A312 ASME B 36.19
SCH. 10S - Acciaio inox**




Seamless pipe SCH.10S - Stainless steel



Tube sans soudure SCH.10S - Acier inoxydable



Tubo sin soldadura SCH.10S - Acero Inoxidable

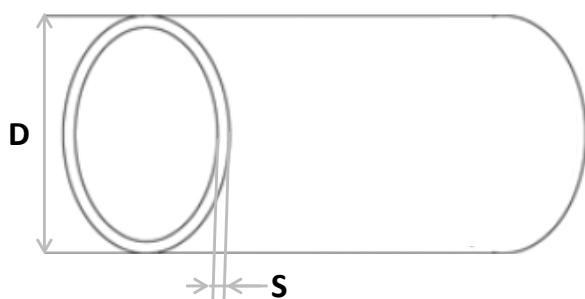

D		ø	S	Kg/m
1/2"		21,3	2,11	1,01
3/4"		26,7	2,11	1,29
1"		33,4	2,77	2,12
1 1/4"		42,4	2,77	2,73
1 1/2"		48,3	2,77	3,15
2"		60,3	2,77	3,99
2 1/2"		73	3,05	5,34
3"		88,9	3,05	6,55
4"		114,3	3,05	8,49
5"		141,3	3,40	11,74
6"		168,3	3,40	14,03
8"		219,1	3,76	20,00




**Tubo senza saldatura ASTM A312 ASME B 36.19
SCH. 40S - Acciaio inox**

Seamless pipe SCH. 40S - Stainless steel

Tube sans soudure SCH. 40S - Acier inoxydable

Tubo sin soldadura SCH. 40S - Acero Inoxidable

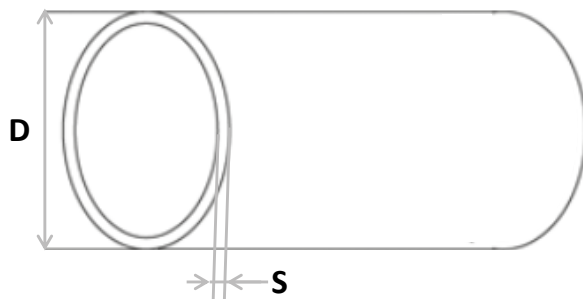

D		ø	S	Kg/m
1/2"		21,3	2,77	1,28
3/4"		26,7	2,87	1,71
1"		33,4	3,38	2,54
1 1/4"		42,4	3,56	3,44
1 1/2"		48,3	3,68	4,10
2"		60,3	3,91	5,52
2 1/2"		73	5,16	8,76
3"		88,9	5,49	11,46
4"		114,3	6,02	16,32
5"		141,3	6,55	22,10
6"		168,3	7,11	28,69
8"		219,1	8,18	43,20




**Tubo di precisione senza saldatura
EN 10216-5 TC1 - Acciaio inox**

Seamless precision tube - Stainless steel

Tube de précision sans soudure - Acier inoxydable

Tubo de precisión sin soldadura - Acero Inoxidable

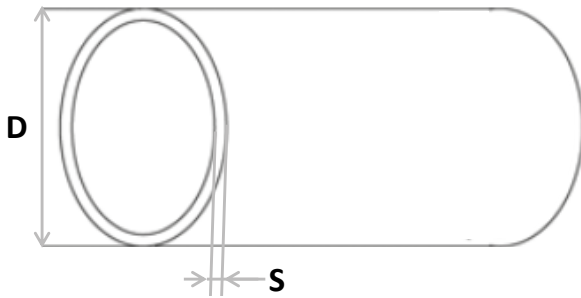

Ø	S		Kg/m
6	1		0,125
	1,5		0,169
8	1		0,175
	1,5		0,244
10	1		0,225
	1,5		0,319
	2		0,401
12	1		0,275
	1,5		0,394
	2		0,501
16	1,5		0,545
	2		0,701
	2,5		0,845
	3		0,977
20	2		0,901
	2,5		1,096
	3		1,277
25	2		1,152
	2,5		1,409
	3		1,653
28	1,5		0,995
	2		1,302
	2,5		1,596
30	2		1,402
	2,5		1,720
	3		2,028
	4		2,604